




BOLTECH

PIONEER OF TECHNOLOGY

Electro-Hydraulic scissor lift

HSL 451 , HSL 452 , HSL 453 , HSL 454
HSL 501 , HSL 502 , HSL 503 , HSL 504

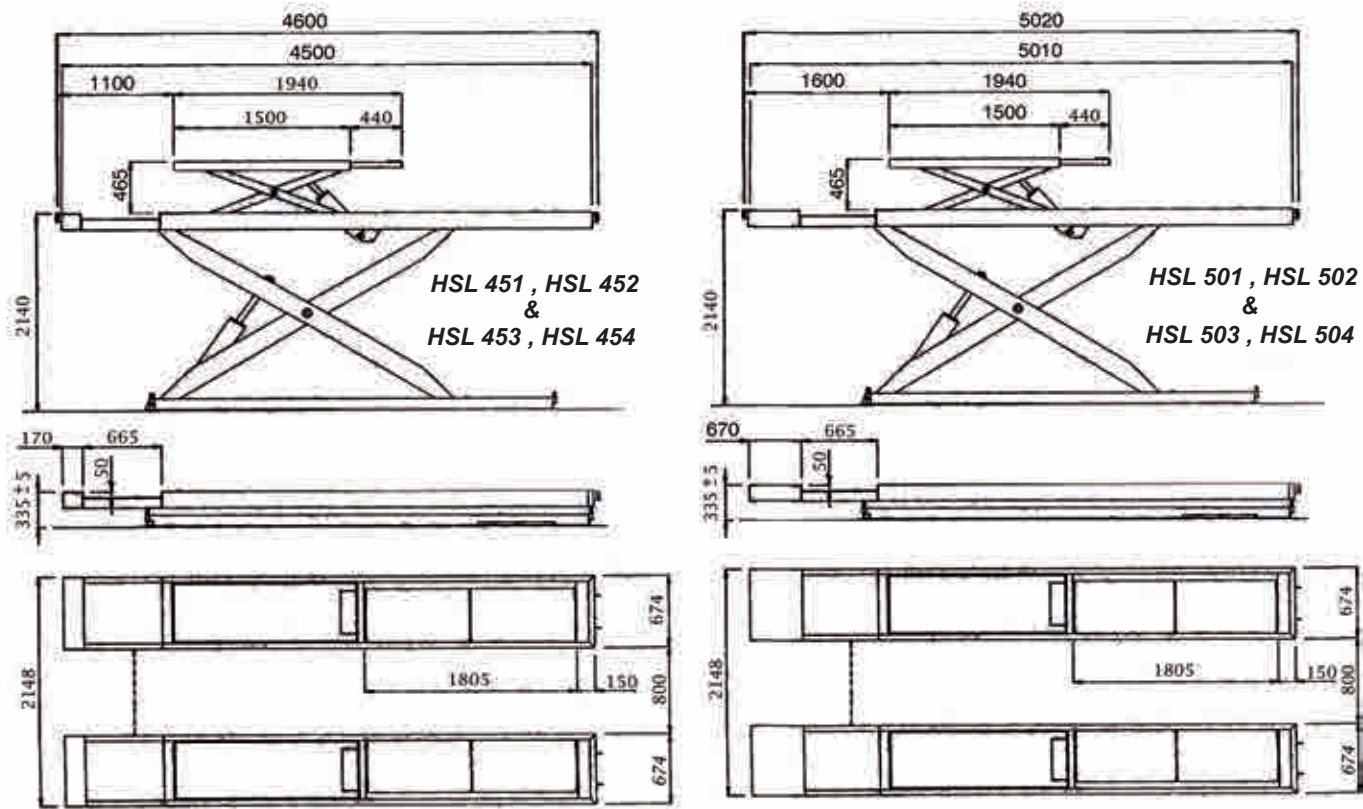

Long ramp for floor installation

Technical Data

	HSL 451	HSL 452	HSL 453	HSL 454	HSL 501	HSL 502	HSL503	HSL 504
Max. capacity (Main Lift)	4500 Kg				5000 Kg			
Max. capacity (Table Lift)	N/A	N/A	3000 Kg	3000 Kg	N/A	N/A	3000 Kg	3000 Kg
Maximum Height (Main Lift)	1700 mm for in-ground version , 2000-2100 mm for on floor versions.							
Maximum Height (Table Lift)	N/A	N/A	565 mm	565 mm	N/A	N/A	565 mm	565 mm
Platform length	4500 mm				5100 mm			
Platform width	800 mm							
Lifting time	60 sec							
Lowering Time	60 sec							
Electric Motor power	3 kw							
Pump	6.5 lit/min							
Max working pressure	240 bar							
Pneumatic working pressure	4-8 bar							
Control circuit tension	24 V							
Rear Slip Plate	NO	Yes	Yes	No	NO	Yes	Yes	No
Recess for Turn table	NO	Yes	Yes	No	NO	Yes	Yes	No
Table lift	NO	No	Yes	Yes	NO	No	Yes	Yes



39100 Bolzano Maso Della Pieve Str.nr. 4/f ITALY
Tel : +39 - 471263755 Direct : +37- 282873136 Fax : +39 - 471267009
Sales@boltech.it

CE SELECT YOUR COLOR

Specification

- Versions: inground/on floor
- Electric-hydraulic functioning
- hydraulic synchronism of platforms
- Rack mechanical safety on main lift and auxiliary lift pistons (LT and GT)
- Hydraulic safety using parachute valve
- Overload security valve
- Lowering control valve
- Photoelectric sensor safety device for platform leveling
- Manual lowering device in case of power failure
- Acoustic-light signal for final lowering phase
- Micro switch sensors
- Low voltage controls (24V)
- Internal guide for jack sliding



HSL 453

- Slip plates for wheel alignment (Optional)
- Ready to install turn-tables for wheel alignment (Optional)
- Table lift for run-out compensation procedure in wheel alignment process (Optional)
- Suitable for Wheel alignment (Optional)



HSL 502

- Suitable for 3D wheel alignment (HSL 452-L)

Best Quality Power Unit To Reach More Life Time And Power

Table lift for run-out compensation procedure in wheel alignment process (Optional)



Rear Slip Plates to provide rest of vehicle rear axle for wheel alignment (Optional)



Best quality Cylinders



Ready to install turntables for wheel alignment (Optional)

Follow us by your smart device
www.boltech.it



Follow us by your smart device
www.boltech.it

